





WhiteLite™ DX USB


User's Guide

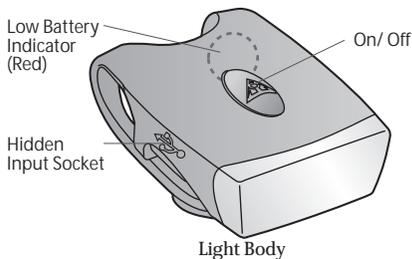


* Fit $\varnothing 22.2\text{ mm} - 31.8\text{ mm}$




MODE



MOUNTING ON HANDLEBAR

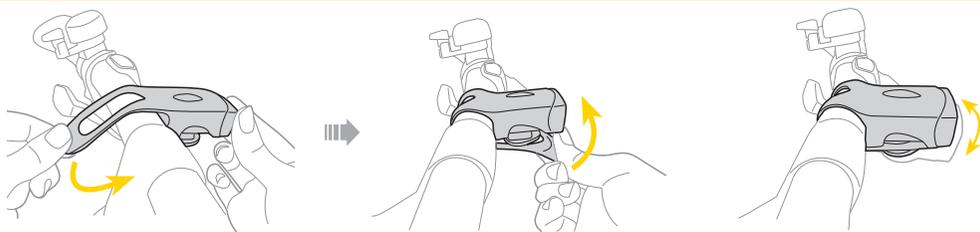

BATTERY CHARGING

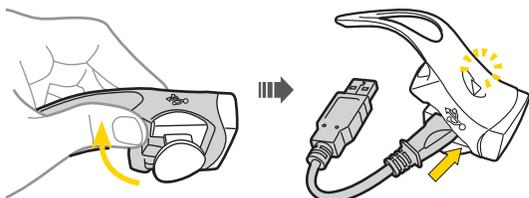

Standard charging time
5 - 6 hours (approx)

1. The WhiteLite DX USB LED will be in GREEN when charging. The LED will turn off when battery is fully charged.
2. The WhiteLite DX USB LED will not illuminate if the adaptor is faulty.
3. Disconnect the USB port from your computer outlet when the WhiteLite DX USB is removed.
4. After WhiteLite DX USB is fully charged, unplug the USB line.
5. Do not open light body.
6. Li-ion battery may take 3 to 5 charging cycles to attain full capacity.
7. Do not leave battery connected to charger over 48 hours continuously.
8. Charging with USB Hub will take longer charging time.

⚠ WARNING

1. Make sure rubber strap is fastened on WhiteLite DX USB properly before riding.
2. Although light body is waterproof never intentionally submerge it under water.
3. For ultimate safety, the WhiteLite should be used in conjunction with a specific night riding light.
4. In addition to its brightness, the beam is widely diffused. In case you need to use this light on public roads, be sure to adjust the angle downward so as not to blind oncoming traffic.



SPECIFICATIONS

Function: blinking and constant
 Bulb: 4 White L.E.D.
 Battery: 3.7V 240mAh
 Lithium Ion
 Charge: USB power supply
 5V 500mAh
 Burn Time (approx): 11 hours
 (constant mode)
 Weight: 40 grams (light only)
 Reserve Time: 1 hour

*WhiteLite DX USB provides up to 1 hour safety reserve time when battery is low. Charge battery when the RED low battery indicator is on.

WARRANTY

1-year Warranty: All mechanical components against manufacturer defects only.

Warranty Claim Requirements

To obtain warranty service, you must have your original sales receipt. Items returned without a sales receipt will assume that the warranty begins on the date of manufacture. All warranties will be void if the product is damaged due to user crash, abuse, system alteration, modification, or used in any way not intended as described in this manual.

* The specifications and design are subject to change without notice.

Please contact your Topeak dealer with any questions.

For USA customer service, call: 1-800-250-3068

Website: www.topeak.com



Copyright © Topeak, Inc. 2011 M-TMS040-GB 12/11