
NOTE:

as it may break.

• Do not twist the yellow plastic lip

set may only be used to tighten bolts otherwise this will result in a loss of calibration.



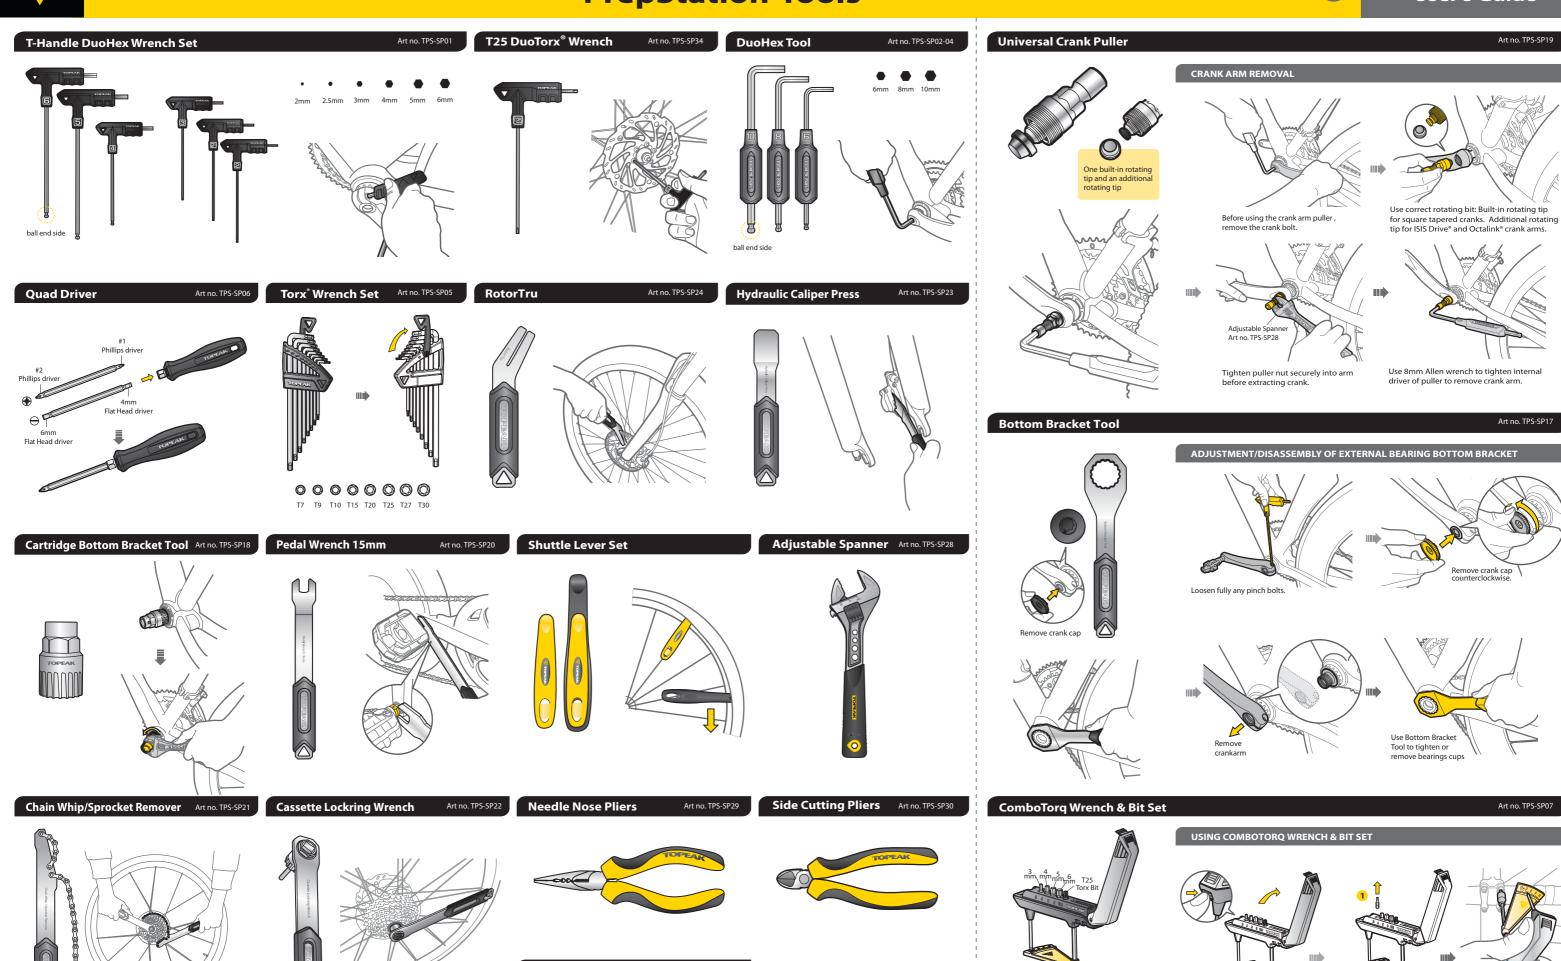


TOPEAK

PREPARE TO RI


8/10mm Double Open End Spanner



Art no. TPS-SP13




DuoSpoke Wrench (14G/15G) Art no. TPS-SP14



Art no. TPS-SP15 **Threadless Saw Guide**

Art no. TPS-SP26






Option 1









Chainring Nut Wrench Art no. TPS-SP11 Sprocket Clean Brush Art no. TPS-SP33






Cable & Housing Cutter

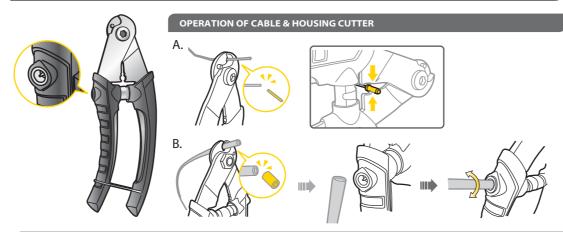


PowerLink Pliers

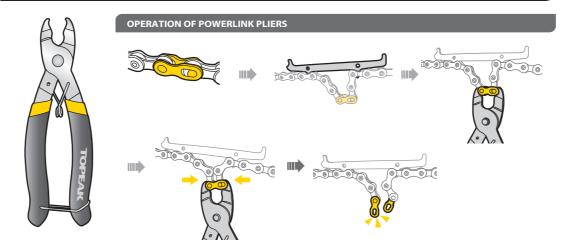

Threadless Nut Setter

Art no. TPS-SP25

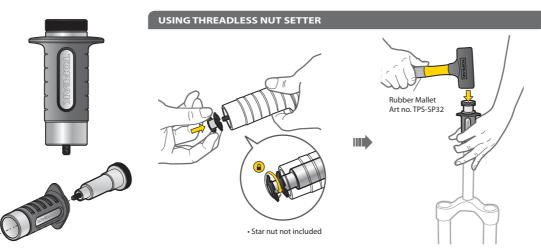

Rubber Mallet Art no. TPS-SP32



Half Round Rasp


- * Campagnolo® is a registered trademark of Campagnolo S.r.l.
- ${}^\star\text{Teflon}{}^\circ$ is a registered trademark of DuPont.
- * Mavic® is a registered trademark of SALOMON S.A. * Shimano® is a registered trademark of Shimano® Inc.
- * Torx $^{\rm o}$ is a registered trademark of the Camcar Corp. division of Textron Inds.

All Speeds Chain Tool

Art no. TPS-SP16

Art no. TPS-SP08


Fits multi-speed chains, including Campagnolo® 11 speed.



- Chain Tool Plunger Pin
 Chain Pin Breaker

4. Chain Tool Grip 5. Rivet Anvil of Hollow Pin

1. When pressing in the chain pin, push down on the top of the chain to keep it fully engaged in the chain tool cradle. Make sure the press pin of the chain tool is centered against the chain pin.




MAINTENANCE

- 1. Lubricate and maintain tool with Teflon® based lubricant when needed.
- $\ensuremath{\text{2.}}$ To prevent rusting, keep tool dry.

HOW TO REPLACE CHAIN PIN




Use Chain Hook or Chain Hook &Wear Indicator (optional) to hook chain and hold the target chain rivet in center position.




Press out old chain pin and replace with new chain pin.





INSTALLATION INSTRUCTION FOR CAMPAGNOLO® 11-SPEED HOLLOW CHAIN PIN

After pressing the special replacement pin into Campagnolo* 11-Speed chain and breaking off the guide portion, the break off end of the chain rivet is required to be peened to prevent chain failure.







Chain Hook & Wear Indicator

Art no. TPS-SP09

1)Put " STEP 1 " inside chain space and fully engage a roller




Art no. TPS-SP31



Copyright © Topeak, Inc. 2013

2) PRESS " STEP 2 " on a roller



TOPEAK