

Foot pack 368/369

For vehicles with narrow rain gutters

368/1060-13

369/1060-14

5 *års garanti*
years warranty
Jahre Garantie
ans de garantie

Must be supplemented with load carrier bars, see the Thule Roof rack guide.

Components:

368: 4 feet + fittings.

369: 4 feet + fittings.

Materials:

Feet in galvanized, black powder coated steel plate.

Function:

Position the plastic-coated feet in the rain gutters. The brackets grip the gutters simultaneously when the bars are fastened with the help of the knobs.




- Feet and bars attach to the roof simultaneously with the help of thumb bolts.
- Maximum roof load: 100 kg. Observe the vehicle manufacturer's instructions.
- TÜV/GS-approved.
- Patented THULE design.
- No additional protection for rain gutters required as the feet and brackets are coated in Pebax plastic.
- Can be locked with four lockable knobs, Art No: 527.
- Featuring THULE's One Key System.



Foot pack 368/369

For vehicles with narrow rain gutters

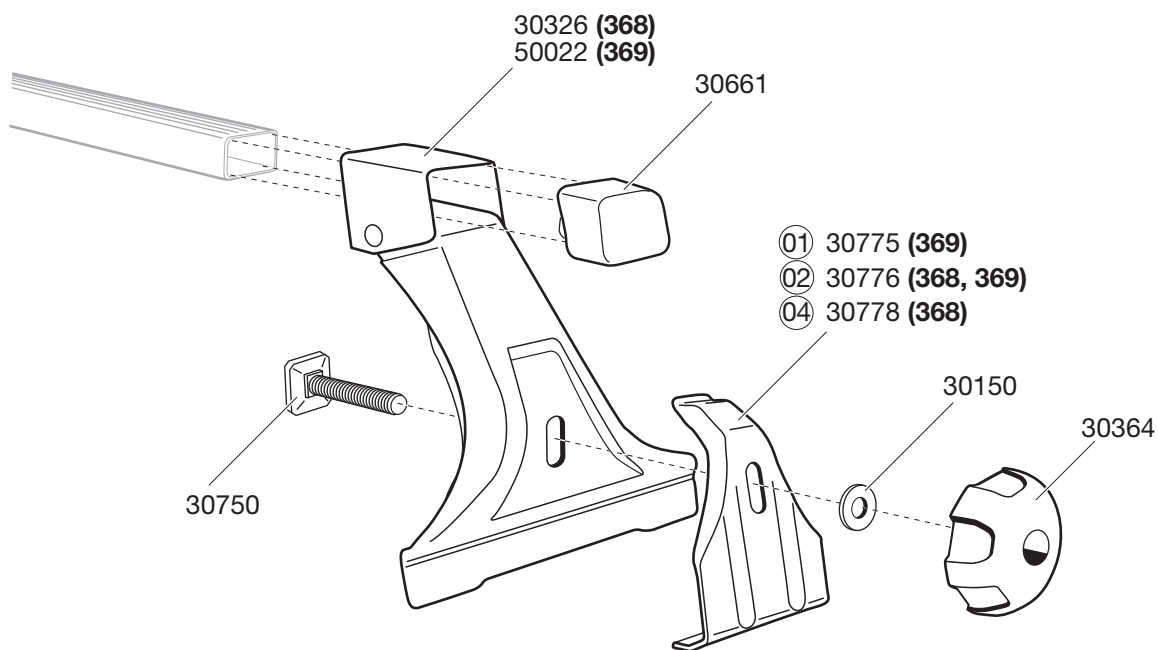

368 1060-13
369 1060-14

410/1

Individual packs

| Product | EAN | Kg | L/W/H in cm |
|------------|---------------|-----|-------------|
| 368 | 7313021060131 | 2,9 | 40/20/9 |
| 369 | 7313021060148 | 3,4 | 40/20/9 |

Pallet

| Product | Qty/kg | L/W/H in cm |
|------------|---------|-------------|
| 368 | 144/430 | 120/80/120 |
| 369 | 144/502 | 120/80/120 |