

PRODUCT INFO




BACK-ROLLER URBAN QL3.1


Rear pannier (single bag) with roll closure and QL3.1 system



- Additional closure with buckle and D-ring (when the bag is carried with the shoulder strap)
- Roll closure
- Waterproof Cordura cotton blend
- Buckles for closing the roll closure at the top or for attaching the shoulder strap
- Lateral 3M Scotchlite reflectors on both sides
- Shoulder strap with padding for comfortable carrying or for fixing to the hook

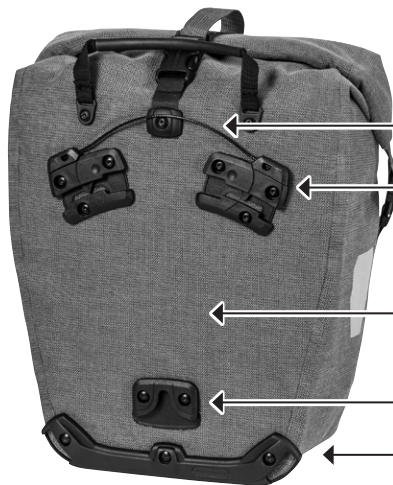

- QL3.1 release handle
- Upper QL3.1 mounting
- Clean uncluttered back, no protruding hooks
- Lower QL3.1 mounting
- Edge protector

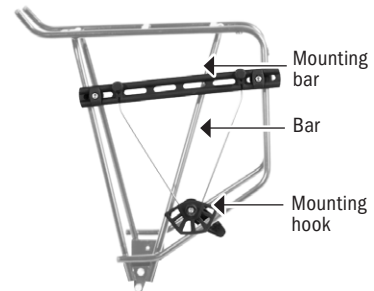

QL3/QL3.1 mounting components (incl.)

height cm/in	width cm/in	depth cm/in	volume L/cu.in.	weight g/oz
42	23/32	17	20	900/31.7

SPECIFICATIONS:

- + Classical rear pannier (single) with roll closure
- + With QL3.1 mounting system
- + Ideal for work, university or school
- + Sturdy soft-touch PU-laminated Cordura cotton blend
- + Mounting components are fixed to rack
- + Standard mounting for rack tube diameters up to 10 mm
- + Single handed mounting and release of bag
- + Flat mounting elements ensure smooth uncluttered back of bag
- + Height and inclination of bag can be adjusted individually
- + Lower hook rotatable of mounting set
- + Integrated inner pocket
- + Can be easily cleaned inside
- + Removable shoulder strap
- + Two highly reflective 3M Scotchlite reflectors

Contents: QL3.1 pannier comes with shoulder strap and QL3.1 mounting components

Optional accessories: QL3.1 mounting brackets for racks with diameter 12 to 14 mm

Attention: Maximum load per bag or per side of carrier is 9 kg / 20 lbs. As the admissible load of carriers differ, note the maximum admissible load - (information is normally found on the carrier) - do not exceed the carrier load limit. We recommend to check-weigh packed bags before riding - reduce the load if necessary. This applies to rear and front carriers and also to lowriders mounted on the fork. Note that the use of bike panniers will significantly influence the riding properties of your bike.

Note: For reaching protection standard IP64 (6=dustproof, 4=protected against splash water coming from all directions) the roll closure must be rolled 3-4 times and fixed downwards.