

THULE Vision 650

661/anthracite

601009 (Thule GmbH) 3038-405-462 (Thule AB)

663/black

601023 (Thule GmbH) 3038-405-162 (Thule AB)

665/brushed aluminium

601115 (Thule GmbH) 3038-405-362 (Thule AB)

5 *års garanti*
years warranty
Jahre Garantie
ans de garantie

Technical approval:

TÜV/ GS DIN 75302 (Germany).

Materials:

100% ABS, recyclable and UV light resistant.

Colour:

See above.

Production method:

Vacuum moulded.

Mounting information:

Variable mounting system with snap fasteners fitted to the bottom of the box, which makes it simple to fit and remove the box. The distance between the load bars can be varied between 550 and 1050 mm.

Locking mechanism:

Patented Dual Side system enables the box to be opened from either the left-hand or the right-hand side. The safety system enables the key to be removed only if the box lid is properly shut.

Dimensions - weight:

Outside dimensions

Length (mm):	2305
Width (mm):	675
Height (mm):	360
Volume (liter):	405
Weight (kg):	20,2


Load:

Maximum load: 75 kg. Observe vehicle manufacturers instructions and maximum roof load.



- Central locking system.
- Dual Force lid lifter.
- Dual Side opening system.
- Aerodynamically optimized design.
- Quick snap 80 mm mounting system (slide system rear and front).
- Ski carrier with straps included.
- THULE One Key System.

THULE Vision 650

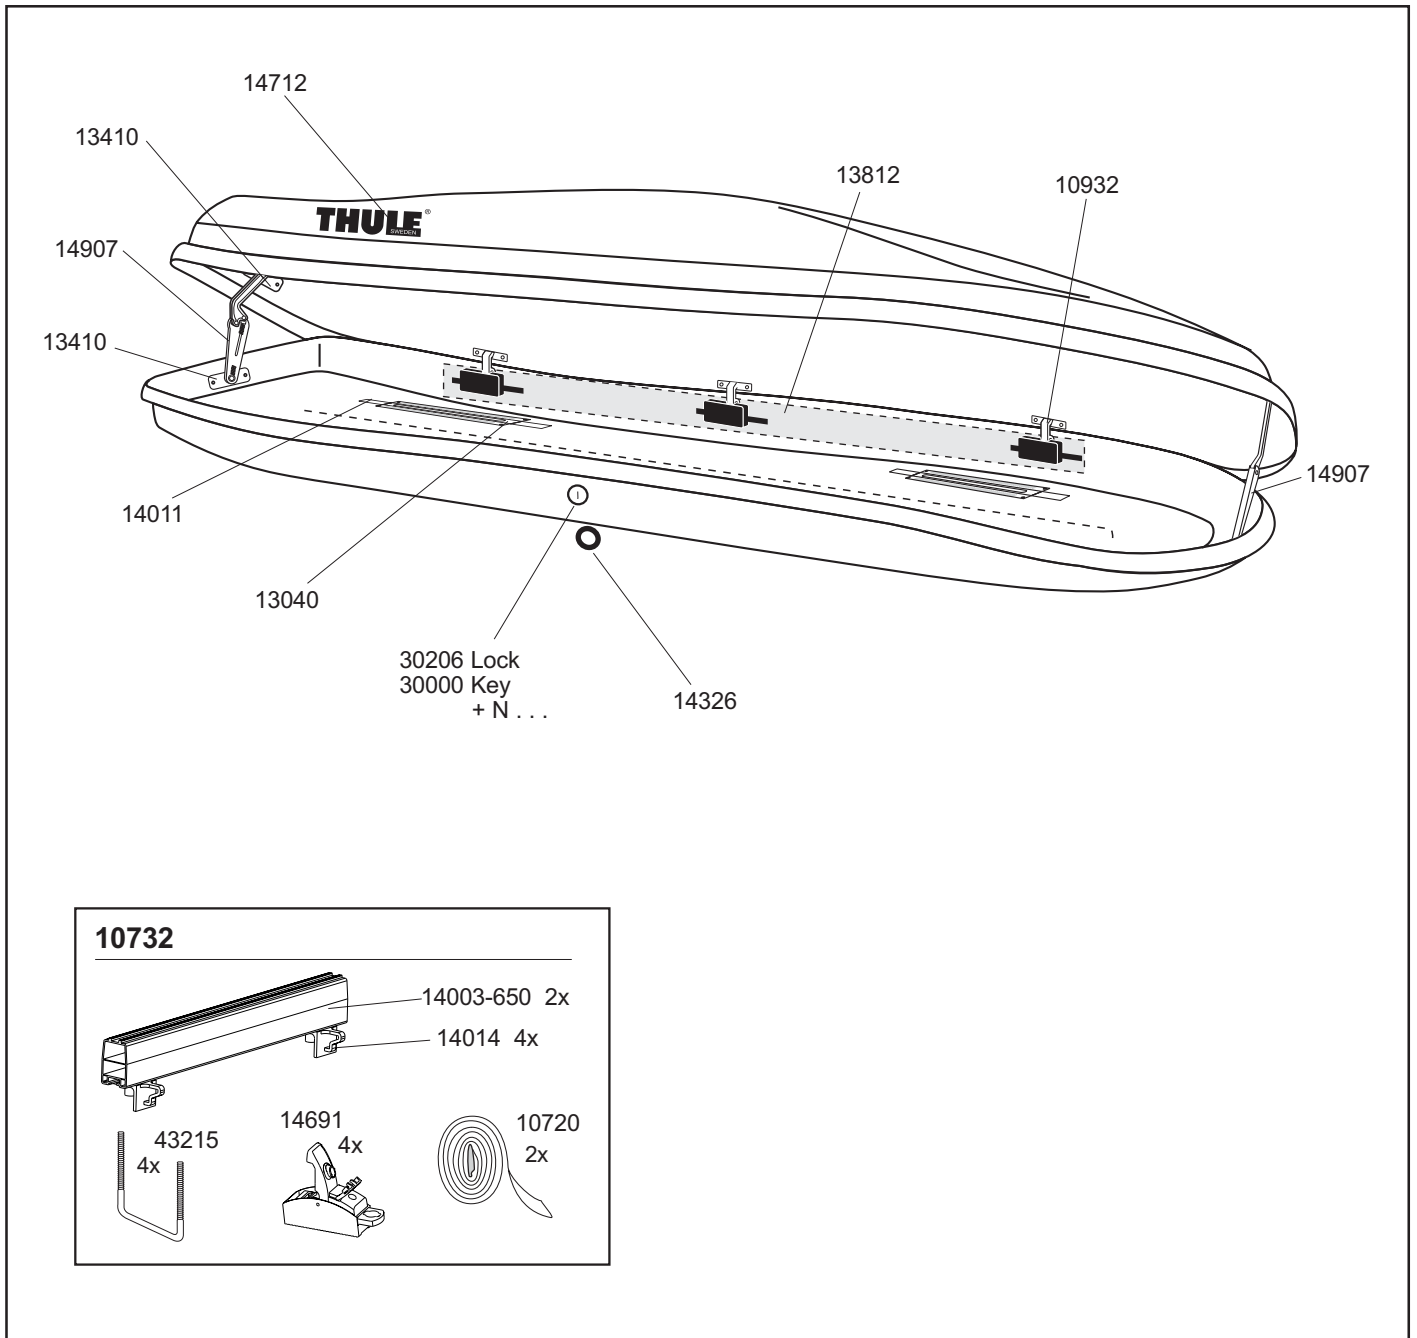

Packaging

Product	EAN	Kg	L/W/H in cm
661	4 002253 601009	25	236/74/41
663	4 002253 601023	25	236/74/41
665	4 002253 601115	25	236/74/41

Product	Packs/Trailer
661	100/12 m trailer
663	100/12 m trailer
665	100/12 m trailer