

FH-7700

Freehub

Before use, read these instructions carefully, and follow them for correct use.

Product specifications

Freehub

Model No.	FH-7700
Gears	9
No. of spoke holes	24 / 28 / 32 / 36
Overlock nut dimensions	130 mm

Cassette sprocket

Model No.	CS-7700		
Sprocket tooth configuration			
11T - 21T	11T, 12T, 13T, 14T, 15T,	16T, 17T,	19T, 21T
12T - 21T	12T, 13T, 14T, 15T,	16T, 17T,	18T, 19T, 21T
12T - 23T	12T, 13T, 14T, 15T,	16T, 17T,	19T, 21T, 23T
11T - 23T	11T, 12T, 13T, 14T, 15T,	17T, 19T,	21T, 23T
12T - 25T	12T, 13T, 14T, 15T,	17T, 19T,	21T, 23T, 25T



Sprockets marked by are secured to the sprocket carrier.

Note

- Do not use the CS-7700 in any combination other than with the CN-7700. Other chains cannot be used as the sizes do not match.
- Two types of lock ring can be used with the CS-7700: one with 11 teeth and one with 12 teeth. Use whichever one matches the sprocket tooth configuration.

Installation of the HG sprockets


For each sprocket, the surface that has the group mark should face outward and be positioned so that the wide parts of the gear projections on each sprocket and the A part (where the groove width is wide) of the freewheel body are aligned.

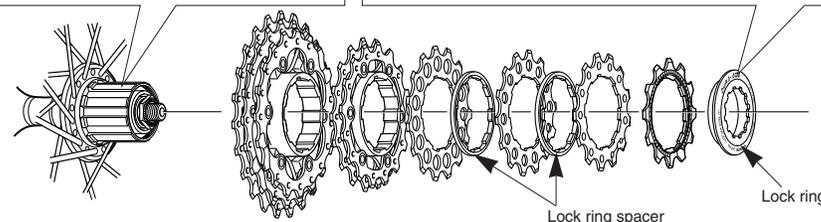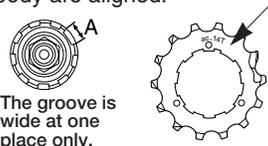

- For installation of the HG sprockets, use the special tool (TL-HG15) to tighten the lock ring.

Tightening torque:
30 - 50 Nm {261 - 434 in. lbs.}

- To replace the HG sprockets, use the special tool (TL-HG15) and TL-SR20 to remove the lock ring.

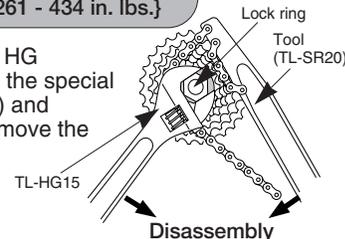


Replacement of the freewheel body

After removing the hub axle, remove the freewheel body fixing bolt (inside the freewheel body), and then replace the freewheel body.

Note:

Do not attempt to disassemble the freewheel body, because it may result in a malfunction.

Tightening torque:
35 - 50 Nm {305 - 434 in. lbs.}

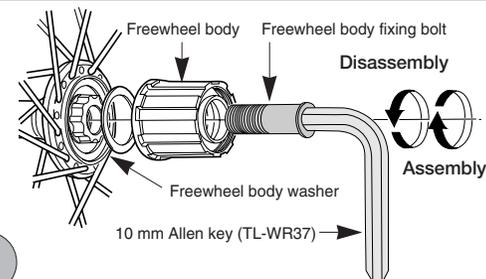

SHIMANO®

SHIMANO AMERICAN CORPORATION
One Holland Irvine CA 92618 U.S.A. Phone 949-951-5003

SHIMANO EUROPA

Industrieweg 24 NL-8071 CT Nunspeet Holland Phone 31-341-272222

Please note: specifications are subject to change for improvement without notice. (English)

© Apr. 1998 by Shimano Inc. XBC SZK Printed in Japan

SHIMANO INC.

77 Oimatsu-cho 3-cho Sakai Osaka 590-8577 Japan Phone 0722-23-3243

These service instructions are printed on recycled paper and can be recycled again

