



SPECS & DIMENSIONS



PRO

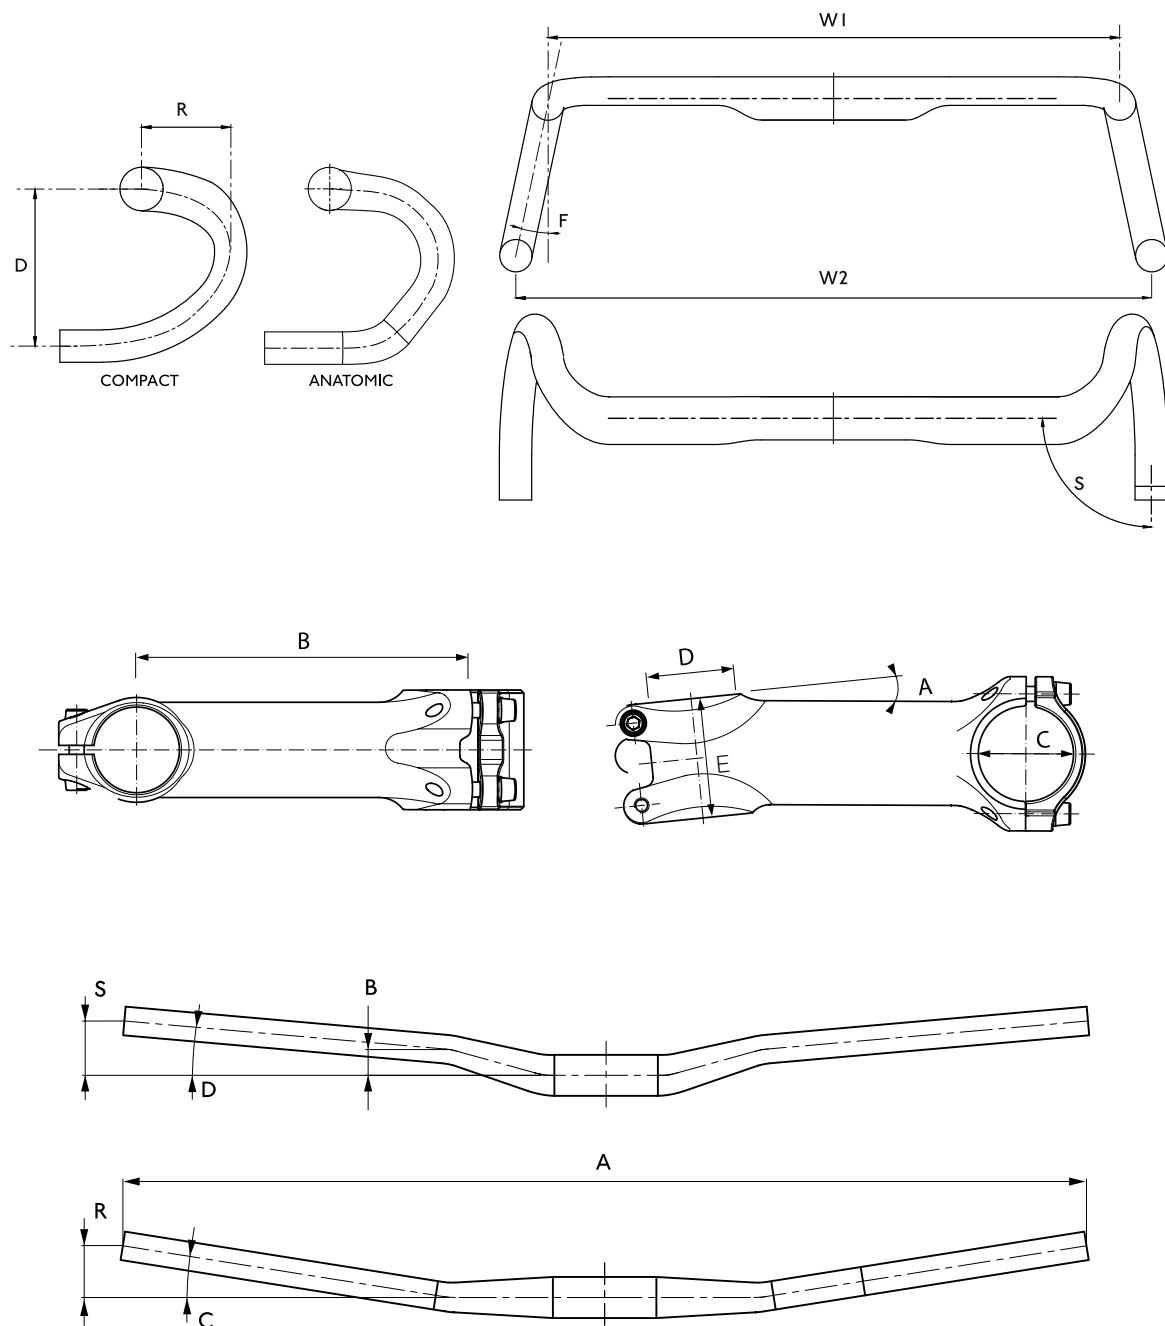

ROAD HANDLEBARS

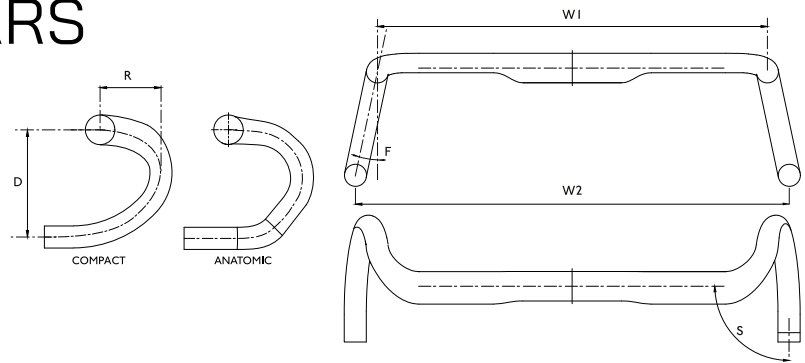


Model	Vibe Aero	Vibe Superlight	Vibe Aero Superlight
Material	T700 & T800 UD Carbon	UD T1100 & T800 carbon	UD T800 & M4075 HM carbon
Top shape	Aero	Round	Aero
Drop shape	Compact	Compact	Compact
Width C-C (W1) [cm]	37 - 39 - 41	38 - 40 - 42	38 - 40 - 42
Drop (D) [mm]	127	130	130
Reach (R) [mm]	79	80	80
Flare (F) [degrees]	10	0	0
Sweep (S) [degrees]	10 forward / 4 downward	0	0
Width drops C-C (W2) [cm]	40 - 42 - 44	38 - 40 - 42	38 - 40 - 42
Cable routing	Full internal	Full internal	Full internal (Di2)
Diameter [mm]	31,8	31,8	31,8
Weight (from) [grams]	250	154	230
Colour	Black	Black	Black

Model	Vibe Aero alloy	Vibe Aero alloy Pursuit	PLT carbon	PLT alloy
Material	AL6066	AL6066	UD T700 carbon	AL2014
Top shape	Aero	Aero	Round	Round
Drop shape	COMPACT	COMPACT	Compact	Compact
Width C-C (W1) [cm]	38 - 40 - 42	36 - 38 - 40	38 - 40 - 42	36 - 38 - 40 - 42 - 44 - 46
Drop (D) [mm]	130	130	120	125
Reach (R) [mm]	78	101 - 103 - 105	70	70
Flare (F) [degrees]	6	10	4	0
Sweep (S) [degrees]	0	0	0	0
Width drops C-C (W2) [cm]	41 - 43 - 45	40 - 42 - 44	42 - 44 - 46	36 - 38 - 40 - 42 - 44 - 46
Cable routing	Internal	Internal	external	external
Diameter [mm]	31,8	31,8	31,8	31,8
Weight (from) [grams]	330	330	220 - 225 - 230	255 - 260 - 265 - 270 - 275 - 295
Colour	Black	Black	Black	Black


Model	PLT Ergo alloy			PLT Ergo Carbon			LT	LT ergo
Material	AL2014			UD T700 carbon			AL 6061	AL 6061
Top shape	Ergo			Ergo			Round tapered	Ergo
Drop shape	Compact			Compact Ergo			Compact	Compact
Width C-C (W1) [cm]	36 - 38	40 - 42	44 - 46	36 - 38	40 - 42	44 - 46	38 - 40 - 42 - 44	40 - 42 - 44
Drop (D) [mm]	115	120	125	120	130	140	125	125
Reach (R) [mm]	70	70 - 75	75	68	73	78	70	70
Flare (F) [degrees]	4			4			0	0
Sweep (S) [degrees]	5 backward / 4 downward			0			0	0
Width drops C-C (W2) [cm]	39 - 42	44 - 46	48 - 50	38 - 40	42 - 44	46 - 48	38 - 40 - 42 - 44	40 - 42 - 44
Cable routing	external			external			external	external
Diameter [mm]	31,8			31,8			31,8	31,8
Weight (from) [grams]	260 - 265 - 270 - 280 - 290 - 300			195 - 200 - 205 - 210 - 215 - 220			280	280
Colour	Black			Black			Black	Black

VIBE EVO

Model	Vibe Evo
Material	UD Carbon
Top shape	Aero
Drop shape	Compact
Width C-C (W1) [cm]	38 - 40 - 42
Drop (D) [mm]	132
Reach (R) [mm]	80
Flare (F) [degrees]	5
Sweep (S) [degrees]	0
Width drops C-C (W2) [cm]	40.5 - 42.5 - 44.5
Cable routing	Internal
Diameter [mm]	n/a
Weight (from) [grams]	400
Colour	Black
Stem length (L) [mm]	95 - 105 - 115 - 125
Stem angle [degree]	7,5 - 8,5 - 9,3
Steerer diameter [C]	1 1/8" - 1 1/4" (w/o shim)

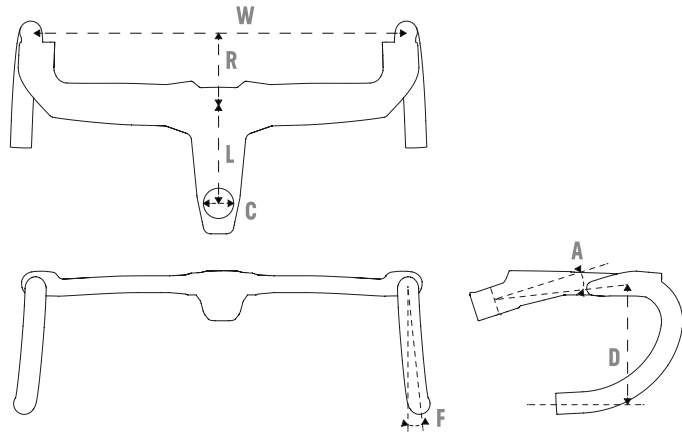


ROAD STEMS




Model	Vibe Aero	Vibe Superlight	Vibe alloy		Vibe carbon	PLT		LT			LT Adjustable
Material	AL7000	AL7075	AL7075		UD carbon	AL2014		AL6061			AL6061
Angle (A) [degrees]	-17	± 6	-10	-17	± 8	± 6	± 17	± 6	± 17	± 35	adjustable
Length (B) [mm]	80 - 90 - 100 - 110 - 120 - 130	70 - 80 - 90 - 100 - 110 - 120 - 130	80 - 90 - 100 - 110 - 120 - 130	90 - 100 - 110 - 120 - 130	80 - 90 - 100 - 110 - 120 - 130	50 - 60 - 70 - 80 - 90 - 100 - 110 - 120 - 130	80 - 90 - 100 - 110 - 120 - 130	60 - 70 - 80 - 90 - 100 - 110 - 120		70 - 90	90 - 110
Bar diameter (C) [mm]	31,8	31,8	31,8		31,8	31,8		31,8			31,8
Steerer diameter (D)	1 1/8"	1 1/8" - 1 1/4"	1 1/8" - 1 1/4"		1 1/8"	1 1/8"		1 1/8"			1 1/8"
Stack (E) [mm]	32	38	36,5		40			40		45	40
Weight (from) [grams]	208	108 (100)	163 (130mm)		120	target weight from 160gr		148 (100mm)			255
Di2 integration	No	No	Yes		Yes	No		No			No
Colour	Black	Black	Black		Black	Black		Black			Black
Cable routing	Semi internal					External					

ROAD SEATPOSTS

Model	Vibe Carbon	Vibe alloy	PLT	LT
Material	UD carbon (post) AL7075 (plates)	AL2014	AL7050	AL6061
Offset (A) [mm]	0 - 15	0 - 20	0 - 20	0 - 20
Clamp construction	2-bolt (top and bottom plate)	1 bolt side clamp	1 bolt side clamp	1 bolt side clamp
Diameter [mm]	27.2 - 31.6	27.2 - 31.6	27.2 - 31.6	27.2 - 30.9 - 31.6
Length [mm]	350	350	400	400
Weight (from) [grams]	204 (27.2) - 219 (31.6)	230	259 - 257 - 298 - 296	285
Di2 battery	Yes, ready	Yes, compatible	Yes, compatible	Yes, compatible
Colour	Black	Black	Black	Black
Side clamps	Plates are independent from rail dimensions	No	No	No




GRAVEL HANDLEBARS

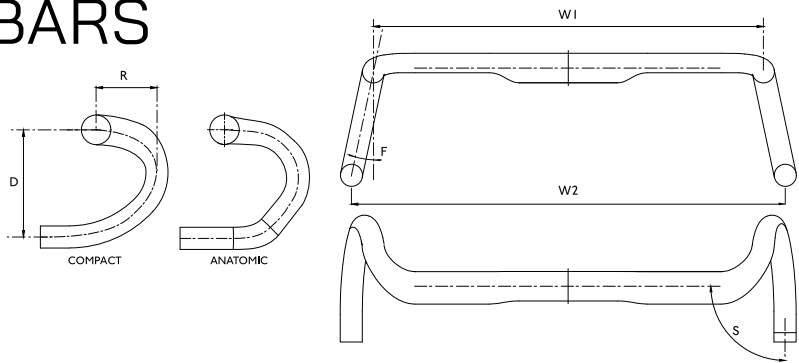

Model	LT gravel	Discover 12 flare	Discover Ergo	Discover Aero	Discover carbon	Discover alloy	Discover alloy 30
Material	AL 6061	AL6066	AL7050	T700 UD carbon & Dyneema	UD carbon	AL6066	AL6066
Top shape	Round tapered	Aero	Ergo	Aero	Ergo	Ergo	Oversized
Drop shape	Compact	Compact	Compact profiled	Compact	Compact	Compact	Compact
Width C-C (W1) (cm)	40 - 42 - 44 - 46	38 - 40 - 42 - 44	40 - 42 - 44 - 46	40 - 42 - 44	40 - 42 - 44	40 - 42 - 44	42 - 44 - 46 - 48
Drop (D) (mm)	110	110	90	100	105	105	90
Reach (R) (mm)	65	70	67	72	75	75	65
Flare (F) (degrees)	10	12	16	12	20	20	30
Sweep (S) (degrees)	0	3 outsweep	3 backward / 2 downward / 3 outward	4 forward / 4 downward	5	5	5
Rise (A) (mm)	-	0	10	0	0	0	0
Width drops C-C (W2) (cm)	44 - 46 - 48 - 50	45 - 47 - 49 - 51	48 - 50 - 52 - 54	44 - 46 - 48	50 - 52 - 54	50 - 52 - 54	56 - 58 - 60 - 62
Cable routing	external	External	External (Di2)	External	Full internal	Semi internal	Semi internal
Diameter (mm)	31.8	31.8	31.8	31.8	31.8	31.8	31.8
Weight (from) (grams)	310	286 - 294 - 302 - 310	305 - 310 - 315 - 325	265 - 280 - 285	205	270	275
Colour	Black	Black	Black - grey	Black	Black	Black	Black

Model	LT	LT ergo	LT gravel
Material	AL 6061	AL 6061	AL 6061
Top shape	Round tapered	ERGO	Round tapered
Drop shape	Compact	Compact	Compact
Width C-C (W1) (cm)	38 - 40 - 42 - 44	40 - 42 - 44	40 - 42 - 44 - 46
Drop (D) (mm)	125	125	110
Reach (R) (mm)	70	70	65
Flare (F) (degrees)	0	0	10
Sweep (S) (degrees)	0	0	0
Width drops C-C (W2) (cm)	38 - 40 - 42 - 44	40 - 42 - 44	44 - 46 - 48 - 50
Cable routing	external	external	external
Diameter (mm)	31.8	31.8	31.8
Weight (from) (grams)	280	280	310
Colour	Black	Black	Black


GRAVEL STEMS




Model	Discover 10	Discover
Material	AL7075	AL7075
Angle (A) (degrees)	± 10	± 6
Length (B) (mm)	60 - 70 - 80 - 90 - 100 - 110 - 120	70 - 80 - 90 - 100 - 110
Bar diameter (C) (mm)	31,8	31,8
Steerer diameter (D)	1 1/8"	1 1/8"
Stack (E) (mm)	33	41
Weight (grams)	142	140
Di2 integration	No	Yes
Colour	Black	Black
Cable routing	Semi internal	

GRAVEL SEATPOSTS

Model	Discover	Discover 320
Material	UD carbon, Dyneema	UD carbon, Dyneema
Offset (A) (mm)	20	20
Clamp construction	1 bolt side clamp	1 bolt side clamp
Diameter (mm)	27.2 - 31.6	27.2 - 30.9 - 31.6
Length (mm)	400	320
Weight (from) (grams)	205	190
Di2 battery	Yes, ready	Yes, ready
Colour	Black / Dyneema	Black / Dyneema
Side clamps	Carbon rail clamp incl	Carbon rail clamp incl



MTB HANDLEBARS

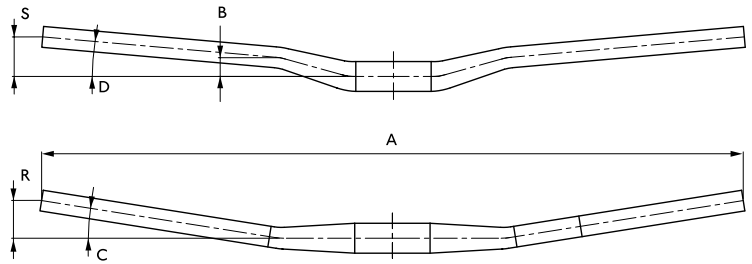

Model	Tharsis 3Five Flat	Tharsis 3Five Flat Top	Tharsis 3Five Carbon Mini Rise	Tharsis 3Five Carbon Rise	Tharsis 3Five Carbon High Rise
Material	UD carbon T800	UD carbon T800	UD carbon	UD carbon	UD carbon
Width (A) [mm]	720	740	780	800	800
Rise (B) [mm]	0	5	10	20	30
Backsweep (C) [degrees]	9	9	9	9	9
Upsweep (D) [degrees]	0	0	4	4	4
Stack (S) [mm]	0	5	29	39	49
Reach (R) [mm]	-37	-39	-42	-45	-48
Diameter [mm]	35	35	35	35	35
Weight [grams]	130	135	195	198	210
Di2 integration	No	No	No	No	No
Colour	Black	Black	Black	Black	Black


Model	Tharsis 3Five Alloy	Koryak Flat	Koryak LowRise	Koryak Riser	Koryak flat top Carbon	Koryak riser Carbon
Material	AL7050	AL2014	AL2014	AL2014	carbon + glass fiber	carbon + glass fiber
Width (A) [mm]	800	720	760	800	740	800
Rise (B) [mm]	20	0	8	20	5	20
Backsweep (C) [degrees]	9	9	9	9	9	9
Upsweep (D) [degrees]	4	n/a	4	4	n/a	4
Stack (S) [mm]	39	0	26	39	5	39
Reach (R) [mm]	-45	-37	-41	-45	-39	-45
Diameter [mm]	35	31.8	31.8	31.8	31.8	31.8
Weight [grams]	250	225	222	274	169	189
Di2 integration	No	No	No	No	No	No
Colour	Black	Black	Black	Black	Black	Black

Model	Koryak E-performance Alloy	Koryak E-performance Carbon
Material	AL7050	Carbon
Width [mm]	800	800
Rise [mm]	20	20
Backsweep [degrees]	11	11
Upsweep [degrees]	4	4
Reach [mm]	-54	-54
Stack [mm]	40	40
Cable routing	Steps/Di2 only*	Steps/Di2 only*
Diameter [mm]	35	35
Weight (from) [grams]	285	245
Colour	Black	Black
Stem lenght [mm]		
Stem angle [degree]		

* = NO BRAKE CABLES

Model	LT flat	LT low rise	LT high rise	LT low rise 20	LT high rise 40
Material	AL6061	AL6061	AL6061	AL2014	AL2014
Width (A) [mm]	720	720	740	800	800
Rise (B) [mm]	0	20	40	20	40
Backsweep (C) [degrees]	9	9	9	9	9
Upsweep (D) [degrees]	0	4	5	5	5
Stack (S) [mm]	0	37	61	44	64
Reach (R) [mm]	-37	-34	-38	-44	-45
Diameter [mm]	31.8	31.8	31.8	31.8	31.8
Weight [grams]	280	330	340	346	346
Di2 integration	No	No	No	No	No
Colour	Black	Black	Black	Black	Black


MTB STEMS

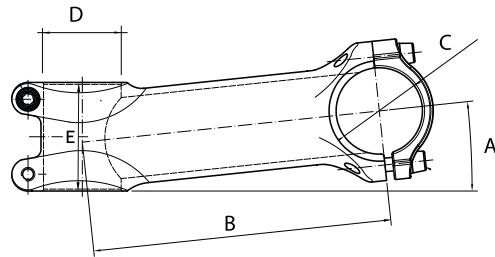


Model	Tharsis	Koryak 3Five	Koryak	Tharsis alloy	Tharsis DM	LT
Material	AL7050	AL6061	AL6061	AL7075	AL7075	AL6061
Angle (A) (degrees)	0	0	0	± 9	0	0
Length (B) (mm)	35 - 40 - 50	35 - 40 - 50 - 60	35 - 40 - 50 - 60	60 - 70 - 80 - 90 - 100	45/50	40 - 50 - 60
Bar diameter (C) (mm)	35	35	31,8	35	35	31,8
Steerer diameter (D)	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"
Stack (E) (mm)	40	40	40	40	40	40
Weight (grams)	145 - 155 - 165	161 - 171 - 195 - 225	170 - 186 - 209 - 228	150	125	132
Di2 integration	No	No	No	No	No	No
Colour	Black - Silver	Black	Black	Black	Black	Black
Cable routing	External	External	External			

MTB SEATPOSTS

Model	LT	Tharsis XC	Koryak
Material	AL6061	UD carbon	AL7050
Offset (A) (mm)	0 - 20	0	0 - 20
Clamp construction	1 bolt side clamp	1 bolt side clamp	1 bolt side clamp
Diameter (mm)	27.2 - 30.9 - 31.6	27.2 - 30.9 - 31.6	27.2 - 30.9 - 31.6
Length (mm)	400	400	400
Weight (from) (grams)	285	199	246
Di2 battery	Yes, compatible	Yes, ready	Yes, compatible
Colour	Black	Black	Black
Side clamps	No	Carbon rail clamp incl	No



PRO DROPPERPOSTS

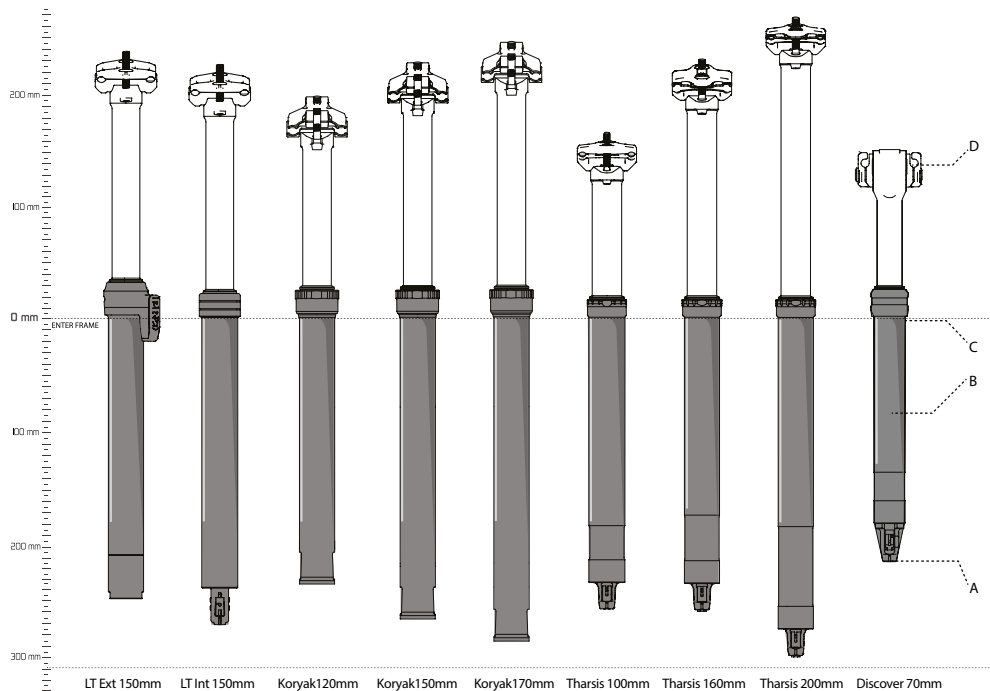

Model	LT 150	LT 150	Koryak 120	Koryak 150	Koryak 170
"Material lower tube: Upper shaft: bolts:"	"AL6061 AL6066 Stainless steel"	"AL6061 AL6066 Stainless steel"	"AL6061 AL2024 Stainless steel"	"AL6061 AL2024 Stainless steel"	"AL6061 AL2024 Stainless steel"
Offset (A) (mm)	0	0	0	0	0
Travel (B) (mm)	150	150	120	150	170
Diameter (mm)	30.9 - 31.6	30.9 - 31.6	30.9 - 31.6	30.9 - 31.6 - 34.9	30.9 - 31.6 - 34.9
Cable routing	Internal	External	Internal	Internal	Internal
Weight (A) (grams)	635	660	490 - 510	530 - 550 - 560	580 - 680 - 710
Colour	Black	Black	Black	Black	Black
Lever type	n/a	n/a	n/a	n/a	n/a
Other dimensions (mm)*					
A > D Total lenght	470	459	412	472	512
A > B Minimum insert	120	160	110	110	110
A > C Lower tube length	238	249	236	266	286
C > D Saddle height at max. insertion	205	210	176	206	226
B > D Saddle height at min. insertion	318	299	302	362	402

*Find the best fitting dropper seatpost by using the online PRO DSP selector tool

Model	Tharsis 100	Tharsis 160	Tharsis 200	Tharsis 34.9	Discover
"Material lower tube: Upper shaft: bolts:"	"AL6061 AL7050 Titanium"	"AL6066 AL7050 Titanium"	"AL7075 AL7050 Titanium"	"AL7075 AL7050 Titanium"	"AL6061 AL6061 Stainless steel"
Offset (A) (mm)	0	0	0	0	0
Travel (B) (mm)	100	160	200	160/200	70
Diameter (mm)	27.2	30.9 - 31.6	30.9 - 31.6	34.9	27.2
Cable routing	Internal	Internal	Internal	Internal	Internal
Weight (A) (grams)	417	485	545	485 / 622	417
Colour	Black	Black	Black	Black	Black
Lever type	n/a	n/a	n/a	n/a	Drop bar type
Other dimensions (mm)*					
A > D Total lenght	400	465	545	465 / 545	350
A > B Minimum insert	113	110	150	110 / 150	120
A > C Lower tube length	257	235	275	235 / 275	249
C > D Saddle height at max. insertion	143	206	246	206 / 246	134.5
B > D Saddle height at min. insertion	287	331	371	331 / 371	236.5

*Find the best fitting dropper seatpost by using the online PRO DSP selector tool

