

# DR-24

## ROAD




### Telaio monoscocca in fibra di carbonio alto modulo

Highest modulus carbon fibre  
monocoque frame



| SIZE | A   | B   | B'  | C   | D     | E     | F   | G   | H   | I   |
|------|-----|-----|-----|-----|-------|-------|-----|-----|-----|-----|
| XS   | 505 | 475 | 435 | 115 | 75°   | 71.5° | 407 | 567 | 367 | 516 |
| S    | 520 | 495 | 455 | 130 | 74.5° | 71.5° | 407 | 578 | 374 | 526 |
| M    | 535 | 530 | 490 | 145 | 74°   | 72°   | 410 | 584 | 379 | 542 |
| L    | 555 | 545 | 505 | 165 | 73.5° | 72°   | 410 | 600 | 389 | 561 |
| XL   | 575 | 575 | 535 | 190 | 73°   | 73°   | 410 | 605 | 395 | 588 |

- Peso: 990 grammi sulla taglia M
- 5 Misure: XS, S, M, L, XL
- Scatola movimento centrale PF30
- Finitura: laminazione esterna UD
- Passaggio filo interno tubo orizzontale e tubo obliquo
- Compatibile sistemi elettronici DI2/EPS
- Tubo sella tradizionale per reggisella 31,6 mm
- Tubo sterzo per serie sterzo "differenziata"
- Serie sterzo Dedacciai compatibile e raccomandata: SSDIFF83
- Forcella Dedacciai compatibile e raccomandata: MFF001Z158
- Peso forcella: 380 grammi (forcellini in carbonio)

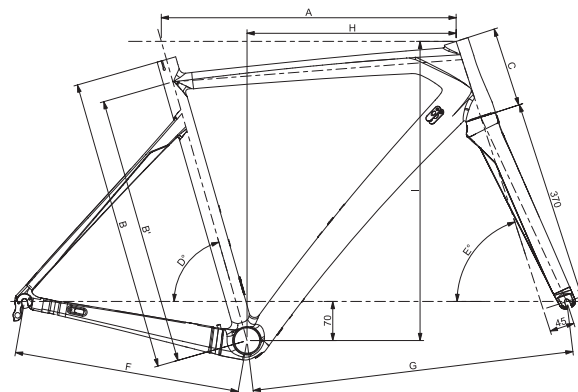

- Weight: 990 grams for the M size
- Five sizes: XS, S, M, L, XL
- Bottom bracket PF30
- Finish: external layer UD
- Internal cable routing: top tube and down tube
- Electronic system compatible DI2/EPS
- Seat tube for 31,6 mm OD seat post
- Head Tube for integrated Head Set 1"1/8 top – 1"1/2 bottom
- Dedacciai compatible and recommended headset: SSDIFF83
- Dedacciai compatible and recommended Fork: MFF001Z158
- Fork weight: 380 grams (carbon dropout)

## Dedacciai

Dedacciai Srl - Via Leonardo da Vinci, 19  
26010 Campagnola Cremasca (CR) - Italy - Ph. +39 0373 74 499

[www.dedacciai.com](http://www.dedacciai.com)



# DR-30

## ROAD



**Telaio monoscocca in  
fibra di carbonio altissimo  
modulo 30T MRC**


.....  
Highest modulus carbon fibre IM 30T MRC  
monocoque frame



| SIZE | A   | B   | B'  | C   | D     | E     | F   | G   | H   | I   |
|------|-----|-----|-----|-----|-------|-------|-----|-----|-----|-----|
| XXS  | 505 | 470 | 410 | 110 | 75°   | 70.7° | 408 | 573 | 370 | 504 |
| XS   | 515 | 490 | 430 | 110 | 74.5° | 71°   | 408 | 577 | 375 | 504 |
| S    | 530 | 520 | 460 | 130 | 74°   | 72°   | 408 | 579 | 379 | 527 |
| M    | 545 | 540 | 480 | 150 | 74°   | 73°   | 408 | 581 | 388 | 548 |
| L    | 560 | 560 | 500 | 170 | 73.5° | 73°   | 408 | 591 | 392 | 567 |
| XL   | 575 | 580 | 520 | 190 | 73°   | 73.2° | 408 | 598 | 396 | 587 |
| XXL  | 595 | 610 | 550 | 210 | 73°   | 73.5° | 408 | 615 | 409 | 607 |

- Peso: 950 grammi sulla taglia M
- 7 Misure: XXS, XS, S, M, L, XL, XXL
- Scatola movimento centrale BB86
- Finitura: laminazione esterna UD
- Passaggio filo interno tubo orizzontale e tubo obliquo
- Compatibile sistemi elettronici e meccanici
- Tubo sella tradizionale per reggisella 27,2 mm
- Tubo sterzo per serie sterzo differenziata 1" 1/8 - 1" 1/2
- Serie sterzo Dedacciai compatibile e raccomandata: MSS118112
- Forcella Dedacciai compatibile e raccomandata: MFF001Z156
- Peso forcella: 350 grammi (forcellini in carbonio)

- .....
- Weight: 950 grams for the M size
  - Seven sizes: XXS, XS, S, M, L, XL, XXL
  - Bottom bracket BB86
  - Finish: external layer UD
  - Seat tube for 27,2 mm ID seat post
  - Internal cable routing: top tube and down tube
  - Electronic and mechanical system compatible
  - Head tube for integrated headset 1" 1/8 top - 1" 1/2 bottom
  - Dedacciai compatible and recommended headset: MSS118112
  - Dedacciai compatible and recommended Fork: MFF001Z156
  - Fork weight: 350 grams (Carbon dropout)

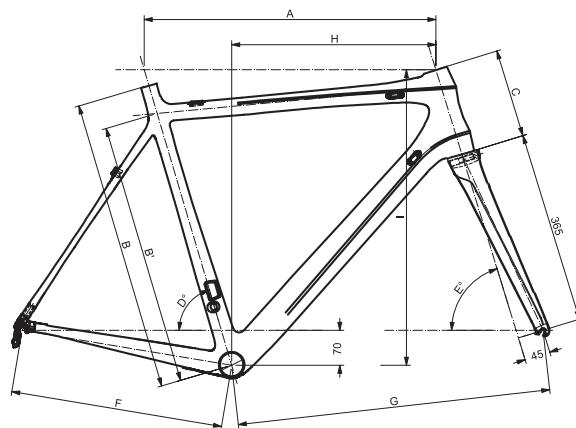

**Dedacciai**

Dedacciai Srl - Via Leonardo da Vinci, 19  
26010 Campagnola Cremasca (CR) - Italy - Ph. +39 0373 74 499

[www.dedacciai.com](http://www.dedacciai.com)



# DR-28

## ROAD



**Telaio monoscocca in fibra di carbonio alto modulo toray T700 24T**


High modulus carbon fibre toray t700 24T  
monocoque frame



| SIZE | A   | B   | B'  | C   | D     | E     | F   | G   | H   | I   |
|------|-----|-----|-----|-----|-------|-------|-----|-----|-----|-----|
| XXS  | 505 | 470 | 410 | 110 | 75°   | 70.7° | 408 | 573 | 370 | 504 |
| XS   | 515 | 490 | 430 | 110 | 74.5° | 71°   | 408 | 577 | 375 | 504 |
| S    | 530 | 520 | 460 | 130 | 74°   | 72°   | 408 | 579 | 379 | 527 |
| M    | 545 | 540 | 480 | 150 | 74°   | 73°   | 408 | 581 | 388 | 548 |
| L    | 560 | 560 | 500 | 170 | 73.5° | 73°   | 408 | 591 | 392 | 567 |
| XL   | 575 | 580 | 520 | 190 | 73°   | 73.2° | 408 | 598 | 396 | 587 |
| XXL  | 595 | 610 | 550 | 210 | 73°   | 73.5° | 408 | 615 | 409 | 607 |

- Peso: 1.100 grammi sulla taglia M
- 7 Misure: XXS, XS, S, M, L, XL, XXL
- Scatola movimento centrale BSA
- Finitura: laminazione esterna UD
- Passaggio filo interno tubo orizzontale e tubo obliquo
- Compatibile solo sistemi meccanici
- Tubo sella tradizionale per reggisella 27,2 mm
- Tubo sterzo per serie sterzo differenziata 1" 1/8 - 1" 1/2
- Serie sterzo Dedacciai compatibile e raccomandata: SSDIFF83
- Forcella Dedacciai compatibile e raccomandata: MFF001Z156
- Peso forcella: 350 grammi (forcellini in carbonio)

- Weight: 1.100 grams for the M size
- Seven sizes: XXS, XS, S, M, L, XL, XXL
- Bottom bracket BSA
- Finish: external layer UD
- Seat tube for 27,2 mm ID seat post
- Internal cable routing: top tube and down tube
- Only mechanical system compatible
- Head tube for integrated headset 1" 1/8 top - 1" 1/2 bottom
- Dedacciai compatible and recommended headset: SSDIFF83
- Dedacciai compatible and recommended Fork: MFF001Z156
- Fork weight: 350 grams (Carbon dropout)

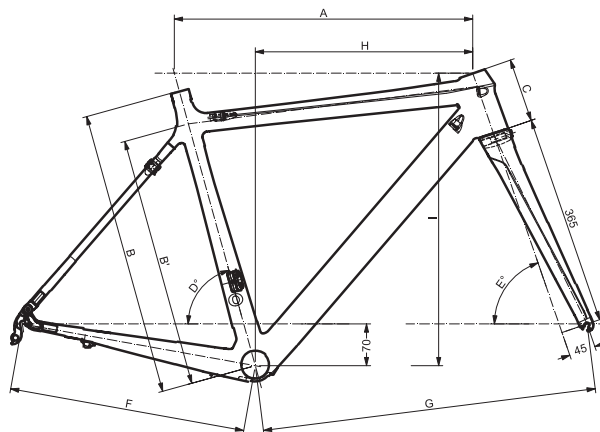

# Dedacciai

Dedacciai Srl - Via Leonardo da Vinci, 19  
26010 Campagnola Cremasca (CR) - Italy - Ph. +39 0373 74 499

[www.dedacciai.com](http://www.dedacciai.com)



# DC-14

## CROSS "V" BRAKE




**Telaio monoscocca in fibra  
di carbonio altissimo modulo  
30T MRC MR 60**

Highest modulus carbon fibre IM 30T  
MRC MR 60 monocoque frame



| SIZE | A   | B   | B'  | C   | D     | E   | F   | G   | H   | I   |
|------|-----|-----|-----|-----|-------|-----|-----|-----|-----|-----|
| S    | 515 | 460 | 420 | 100 | 73.5° | 71° | 425 | 573 | 363 | 513 |
| M    | 535 | 500 | 450 | 125 | 73°   | 72° | 425 | 575 | 367 | 549 |
| L    | 550 | 540 | 470 | 145 | 73°   | 72° | 425 | 590 | 376 | 568 |
| XL   | 570 | 570 | 520 | 165 | 73°   | 72° | 425 | 610 | 390 | 587 |
| XXL  | 585 | 610 | 540 | 195 | 73°   | 72° | 425 | 625 | 397 | 616 |

- Peso telaio: 1.100 grammi sulla taglia M
- 5 Misure: S, M, L, XL, XXL
- Scatola movimento centrale BSA
- Finitura: Laminazione esterna UD
- Passaggio fili interno tubo orizzontale
- Passaggio filo freno esterno
- Compatibile solo con freni di tipo a "V"
- Tubo sella tradizionale per reggisella 31,6 mm
- Tubo sterzo per serie sterzo integrata differenziata
- Serie sterzo Dedacciai compatibile e raccomandata: SSCCDC14
- Forcella Dedacciai compatibile e raccomandata: MFF001Z147
- Peso forcella: 420 grammi

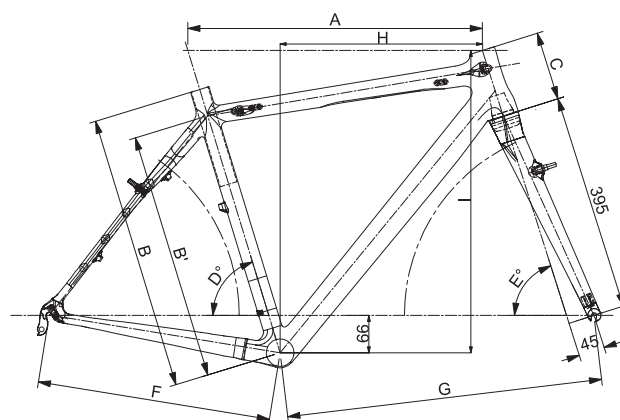

- Weight: 1.100 grams for the M size
- Five sizes: S, M, L, XL, XXL
- Bottom bracket BSA
- Finish: external layer UD
- Internal cable routing
- External brake cable
- Only "V" brake compatible
- Seat tube for 31,6 mm OD seat post
- Head tube for integrated headset 1 1/8 top - 1 1/2 bottom
- Headset Dedacciai compatible and recommended: SSCCDC14
- Fork Dedacciai compatible and recommended: MFF001Z147
- Fork weight: 420 grams

**Dedacciai**

Dedacciai Srl - Via Leonardo da Vinci, 19  
26010 Campagnola Cremasca (CR) - Italy - Ph. +39 0373 74 499

[www.dedacciai.com](http://www.dedacciai.com)



# DM-33

## MTB 29"



**Telaio monoscocca in fibra di carbonio altissimo modulo Toray laminazione esterna UD**


Monocoque carbon fiber frame highest module Toray UD lay-up



| SIZE | A   | B   | B'  | C   | D   | E   | F   | G   | H   | I   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| S    | 580 | 400 | 344 | 100 | 73° | 71° | 440 | 641 | 408 | 613 |
| M    | 600 | 440 | 384 | 110 | 73° | 72° | 440 | 651 | 425 | 625 |
| L    | 620 | 480 | 424 | 125 | 73° | 72° | 440 | 671 | 440 | 640 |

- Peso telaio: 1.250 grammi sulla taglia M
- 3 misure: S, M, L
- Scatola movimento centrale PF30
- Finitura: Laminazione esterna UD
- Passaggio fili interni deragliatore e cambio
- Passaggio filo idraulico esterno
- Compatibile solo con freni a disco
- Tubo sella tradizionale per reggisella 31,6 mm
- Tubo sterzo per serie sterzo semi-integrata "differenziata"
- Serie sterzo Dedacciai compatibile e raccomandata: SSDIFF83
- Forcellini bivalenti per ruote 12x142 (perno passante) o 5x135 (sgancio rapido)

- Weight: 1.250 Grams for M size
- 3 sizes: S, M, L
- Bottom Bracket PF30
- Finish: external lamination UD
- Internal derailleurs cable routing
- External hydraulic cable
- Only disk brake compatible
- Seat tube for 31,6 mm OD seat post
- Head Tube for semi-integrated Head Set 1"1/8 top – 1"1/2 bottom
- Dedacciai compatible and recommended headset: SSDIFF83
- Double function dropouts for 12x142 (go-through axle) and 5x135 (QR)

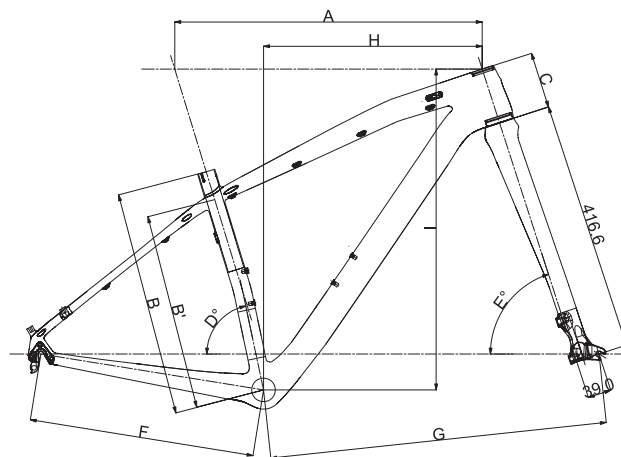

**Dedacciai**

Dedacciai Srl - Via Leonardo da Vinci, 19  
26010 Campagnola Cremasca (CR) - Italy - Ph. +39 0373 74 499

[www.dedacciai.com](http://www.dedacciai.com)



# CRONO

## TIME TRIAL

### » Telaio monoscocca in fibra di carbonio altissimo modulo MRC MR 60


Monocoque carbon fiber frame  
highest modulus MRC MR60



| SIZE | A   | B   | C   | D   | E   | F   | G   | H   | I   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| S    | 486 | 510 | 54  | 77° | 72° | 388 | 557 | 382 | 452 |
| M    | 502 | 535 | 70  | 77° | 73° | 388 | 567 | 392 | 470 |
| L    | 523 | 555 | 90  | 77° | 73° | 388 | 590 | 411 | 489 |
| XL   | 545 | 574 | 110 | 77° | 73° | 388 | 614 | 430 | 508 |

- Peso telaio 1.200 g sulla taglia M
- Taglie S, M, L, XL
- Scatola movimento centrale BB 86 carbonio
- Laminazione esterna UD
- Passaggio fili interno
- Compatibile per sistemi elettronici e meccanici
- Reggisella aero regolabile incluso
- Manubrio Dedacciai integrato con aerobar inclusi con passaggio cavi interno
- Freni cantilever inclusi con carter in carbonio
- Forcella monoscocca in fibra di carbonio peso 440g
- Tubo sterzo 1-1/8"
- Serie sterzo integrata Dedacciai SSC2 inclusa

- Frame weight 1,200 g for the M size
- Sizes S, M, L, XL
- Bottom bracket BB86 carbon
- UD external layer
- Inner cables routing
- Electronic and mechanical devices compatible
- Adjustable aero seat post included
- Integrated Dedacciai carbon handlebar one-piece with aerobar included with inner cable routing
- Integrated custom cantilever brakes with carbon fairing
- Monocoque carbon fork weight 440 g
- Steering tube 1-1/8"
- Integrated Dedacciai headset SSIS2 included

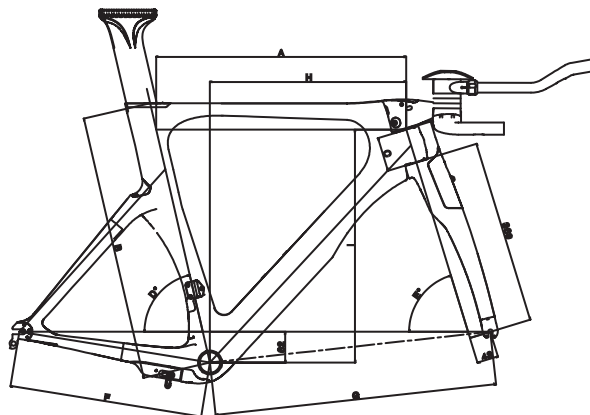

## Dedacciai

Dedacciai Srl - Via Leonardo da Vinci, 19  
26010 Campagnola Cremasca (CR) - Italy - Ph. +39 0373 74 499

[www.dedacciai.com](http://www.dedacciai.com)

